




Pigmented Plaster
12mm to 25mm
thick

Ressi PlastoRend 120 C

RESSICHEM
adding life and value to your property

Step 1: Surface preparation

Surface preparation with metal mesh between the joints of concrete and masonry and application of levelling Dabs.

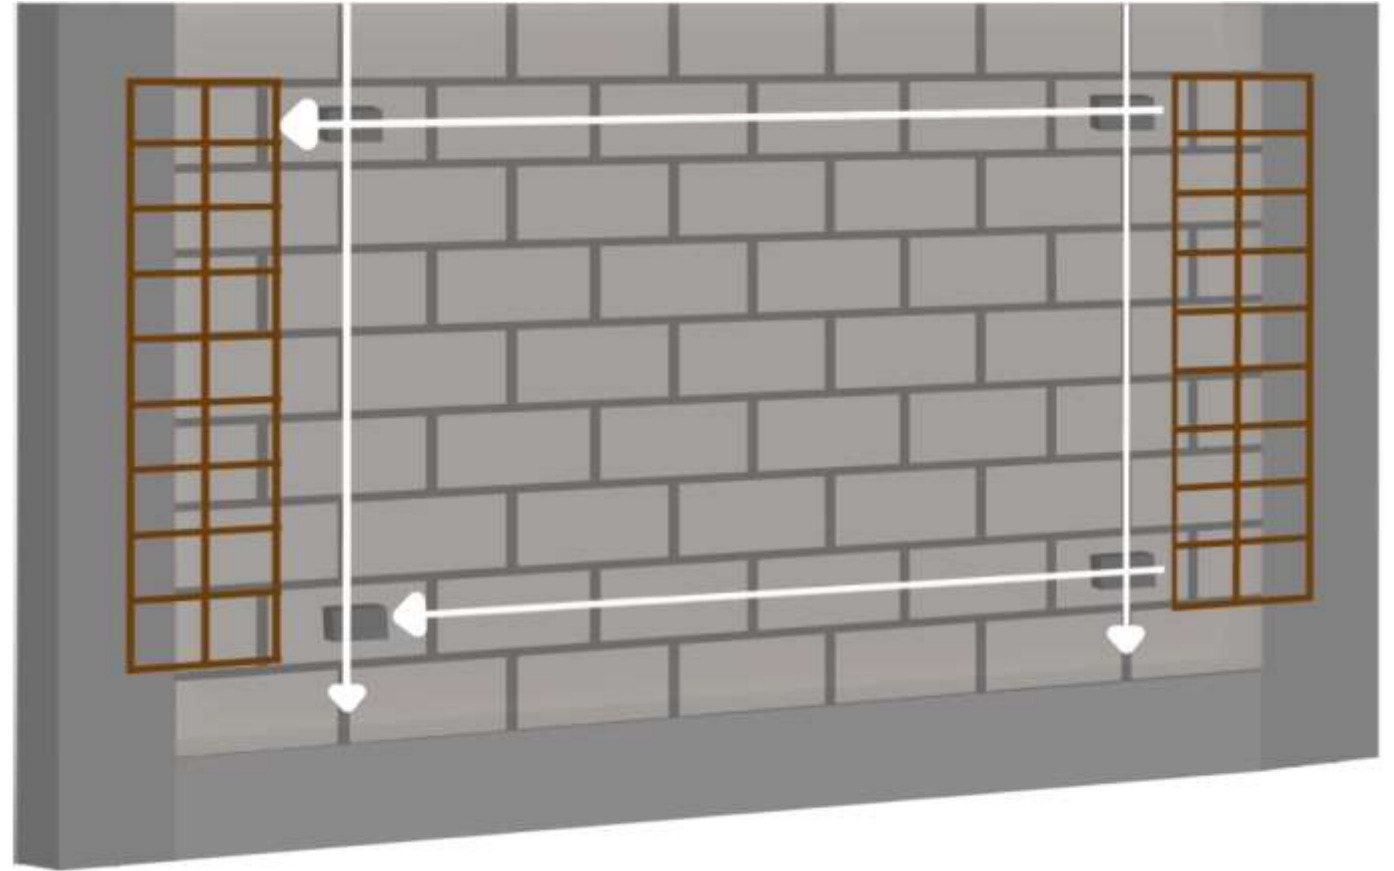

Step 2

Application of Ressi
PlastoRend 120 C
directly on prepared
masonry and concrete
Surface.



Step 3

Finishing the surface as required.



Step 4

Application of **Silblock**
(Water repellent sealer)
for long term plaster
protection.



A Fast and
Efficient
pigmented
plaster
solution



Advantages

- ✓ Ready to use.
- ✓ Good machine flow.
- ✓ Good adhesion to substrate.
- ✓ Saves space (No dumping of sand on site).
- ✓ Accurate Cement content (No dosage errors).
- ✓ Consistent strength (No batch errors).
- ✓ Environmentally friendly; Less wastage.
- ✓ Good compressive & flexural strength.
- ✓ Durable color, UV stable pigments.
- ✓ Save time (No site mix).
- ✓ Can be left bare or covered.
- ✓ Good decorative finish.



RESSICHEM
adding life and value to your property

Thank You

Where To Find Us

D-83, S.I.T.E., Industrial
Area, Manghopir Road, Karachi -
75530, Pakistan.

Tel: +92-21-32593800-02

Fax: +92-21-32593803

Email: info@ressichem.com

Website: www.ressichem.com

